

DYNAMOMETER 04

Complete with plastic case, manual and calibration certificate.



Mechanical properties

- Anodized aluminum housing.
- Electric class of protection: IP 65.
- Overload indication at 10% overload.
- Test load: 2 x measurement limit.
- Safety factor: 5 x measurement limit.

Electric specifications:


- Power supply: standard 9V battery.
- Operating time: up to 100 hours.

Electronic specifications:

- 5-digit LCD display, 17 mm digit height.
- Ambient temperature: -10°C to +55°C.
- Accuracy: appr.0.15% of the displayed value.

Option

- Bow shackle >10 Ton.

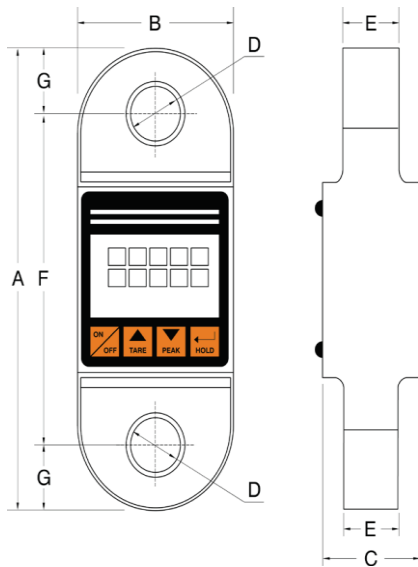

Type	IMPA-Nr.	SWL (kg)	Resolution (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Bow shackle (t)	Weight (kg)
DSD04-1.25	650101	1250	0.5	190	85	54	16	16	142	25	1,50 incl.	0.70
DSD04-2.5	650101	2500	1	215	85	54	21	25	159	28	3,25 incl.	1.35
DSD04-5.0	650101	5000	2	232	85	54	27	32	168	32	6,50 incl.	1.85
DSD04-10.0	650101	10000	5	315	100	59	39	49	203	56	12,00 excl.	3.60
DSD04-20.0	650101	20000	10	350	126	70	55	70	210	70	25,00 excl.	7.00